Sloan ‘TruFlush’ Push-Button Dual-Flushometers

Product Codes: TRF42024 | TRF42036

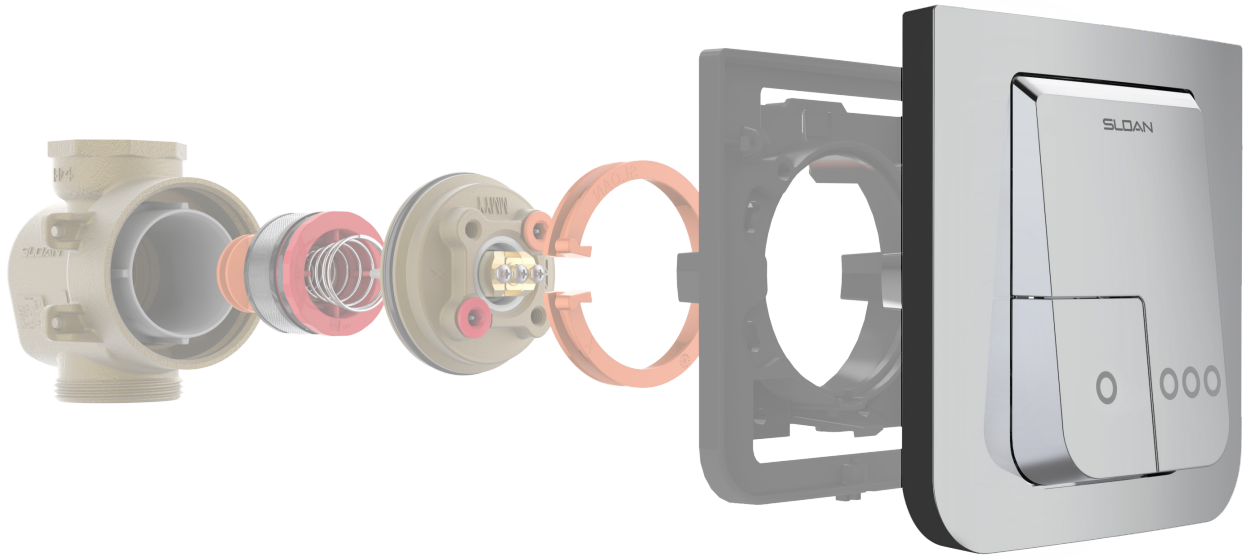

Product Overview

The ‘TruFlush’ Push-Button Dual-Flushometer is a compact, attractive, accurate, reliable, concealed flushometer that is simple to install, easy to operate. It is perfect for any restroom application, ideal for any new construction or as a renovation to most existing plumbing systems and will operate on a 20mm ID standard mains water supply. Its compact size and concealed device allows it to be an integral part of any restroom without interrupting the integrity of the design or architecture. The ‘TruFlush’ Push-Button Flushometer will help gain more usable space in every restroom as it does not require a rear or a top access. It requires only 5 seconds to be ready for repeat flushing and delivers a strong thorough flush each time. The ‘TruFlush’ Push-Button Flushometer includes an integrated control stop, with an all-vertical, in-line, rough-in that allows the installer to bring the plumbing to the device. Once installed, all the servicing can be done through the front access wall panel, which is nearly 70% smaller than the industry standard.

Suitable Market Application

- Multi-storey residential apartments
- Schools and universities
- Health and aged care facilities (e.g.: hospitals, nursing homes, senior living, disabled facilities)
- Public buildings (e.g.: stadiums, entertainment venues, airports, stations, community facilities, recreational centres)
- Institutional buildings (e.g.: child care facilities, dormitories, police stations, gymnasiums and sport facilities, office buildings)
- Commercial buildings (e.g.: hotels, shopping centres, restaurants)

WaterMark
AS 1172.2:2014
Lic No: WM-74580



TRF42024



TRF42036

MAG SPECIALISED PLUMBING PRODUCTS
(03) 9399 8444
sales@magspp.com.au
www.magspp.com.au

Disclaimer: Specification subject to change without prior notice
**Image is for illustration purposes only.*

Sloan ‘TruFlush’ Push-Button Dual-Flushometers

Product Codes: TRF42024 | TRF42036



Features and Benefits

- Operates on a 20mm ID standard mains water supply
- Compact body fits into a 75mm stud wall
- Compatible to be paired up with all major brands of toilet pans
- Front access wall plate requires no rear access
- Corrosion-resistant, heavy duty brass body
- Corrosion free plastic parts, does not allow any scaling or deposit
- Chrome-plated, corrosion-resistant wall plate
- Resistance to fading, oxidation, flaking and bubbling
- Piston color-coded by flush volume for easy identification
- Replaceable piston assembly accessible through front wall plate
- Piston with built in filter to ensure consistent, long-lasting performance
- Concealed shut-off sleeve adjusts flow rate
- Re-flush ready in 5 seconds
- Accurate flush volume with every flush
- Performs with reclaimed/recycled water
- Aspirator technology reduces noise post flushing
- AS 1428.1 (Design for access and mobility) compliant

Product code	***TRF42024***	***TRF42036***
Inlet diameter	20 mm ID	
Operating pressure (flowing)*	150 kPa to 550 kPa	
Outlet diameter	40mm	
WELS Rating	5 Star	3 Star
Full flush volume (Lpf)	4.3	6.1
Half flush volume (Lpf)	2.3	3.1
Average flush volume (Lpf)	2.7	3.7
Wall plate finish	Polished Chrome	
Valve	Piston	
Bypass	Filtered	
Fixture Type	Water Closet (WC)	

**Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.*

WaterMark
AS 1172.2:2014
Lic No: WM-74580



TRF42024



TRF42036

MAG SPECIALISED PLUMBING PRODUCTS
(03) 9399 8444
sales@magspp.com.au
www.magspp.com.au

Disclaimer: Specification subject to change without prior notice
**Image is for illustration purposes only.*

Sloan ‘TruFlush’ Push-Button Dual-Flushometers

Rough-In: TRF42024 | TRF42036

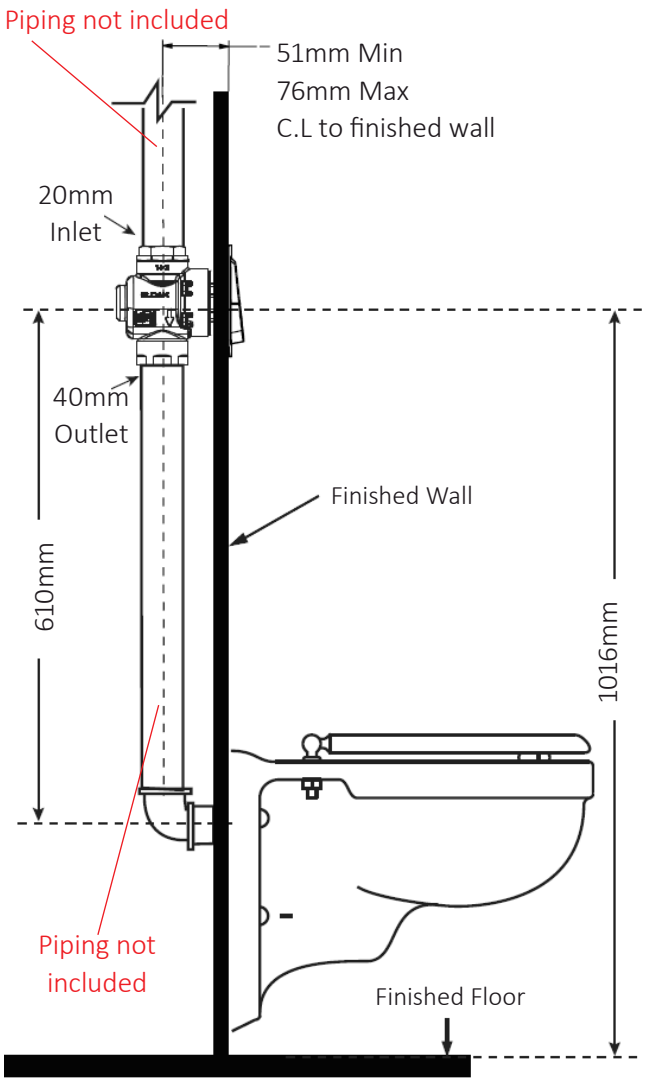



Notes:

- *Installation should comply to AS3500 - National Australian Plumbing Code and any other local and applicable codes*
- *Flush Connections shown in dotted lines not included*
- *Image is for illustration purposes only*

(03) 9399 8444
sales@magspp.com.au
www.magspp.com.au

Disclaimer: Specification subject to change without prior notice
**Image is for illustration purposes only.*

Sloan ‘TruFlush’ Push-Button Dual-Flushometers

Product Codes: TRF42024 | TRF42036

Detailed View

Valve Body
The heavy-duty brass and corrosion resistant body houses the internal components.

Bracket
The bracket is easy to install with only screws needed for mounting.

Activation Assembly
The activation assembly is used to adjust the water flow rate and is easily accessible through the wall plate. The integrated aspirator reduces noise at shutoff.

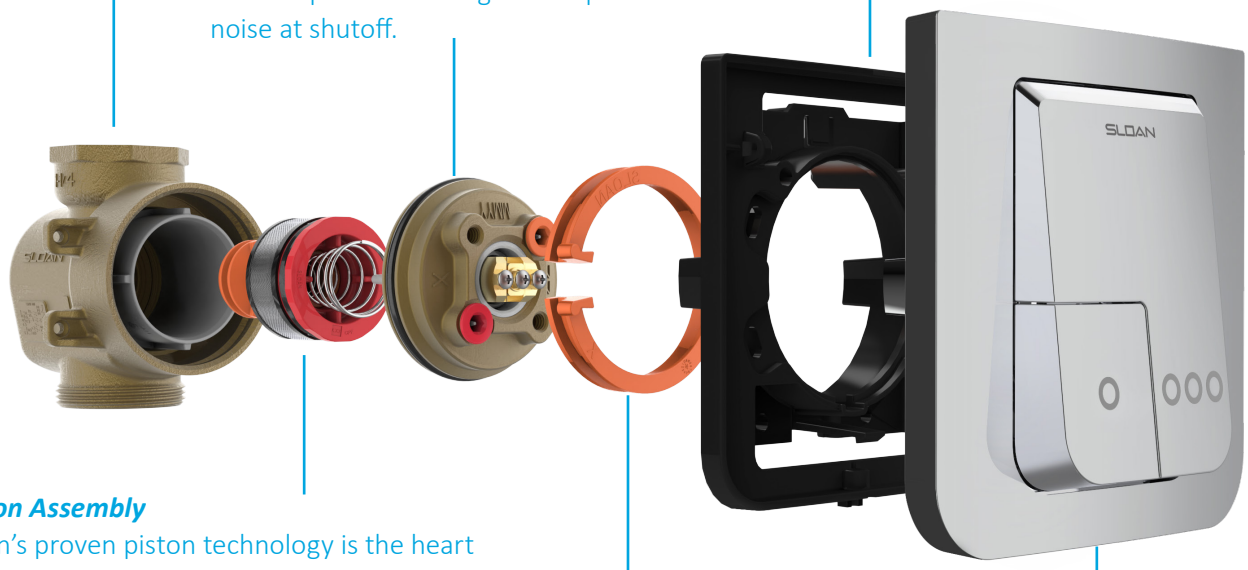

Piston Assembly
Sloan’s proven piston technology is the heart of the flushometer and accurately controls the flush volume. Enhanced filtration is designed for even the harshest water conditions.

Wall Plate and Button
The chrome-finished wall plate design is sleek, simple, vandal-resistant, and built to last.

Safety Clip
During maintenance and installation, the safety ring securely locks the internal components in place.

Disclaimer: Specification subject to change without prior notice
**Image is for illustration purposes only.*